


system for pools, spas, ponds, water features, and tanks





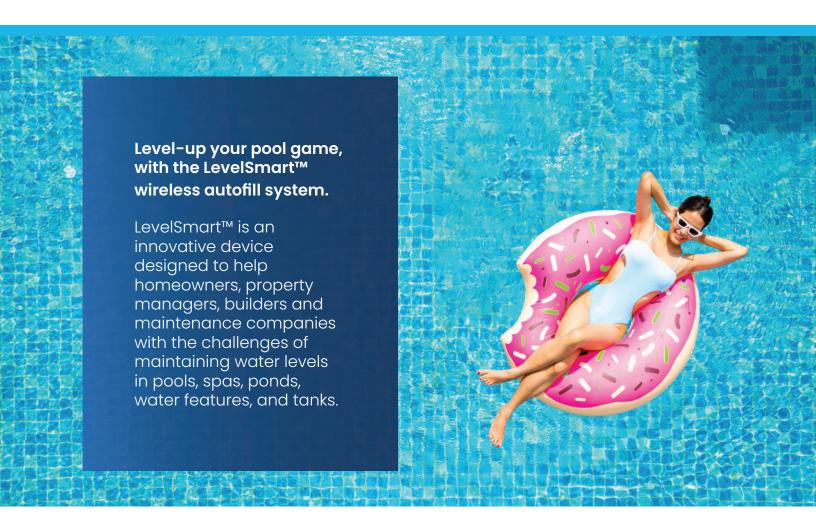

Enjoy a perfect pool, everytime!

Level Smarter, not harder!

LevelSmart[™] eliminates the chore of filling your pool manually and the risk of over-filling it. With 24-hour-per-day wireless monitoring, LevelSmart[™] automatically maintains the water level of your pool, spa, pond, water feature, or tank.

LevelSmart[™] can be easily installed to any new or existing application. American-made quality, combined with an innovative and patented proprietary sensing method, ensures that LevelSmart is the most reliable and user-friendly autofill system on the market.



Why choose LevelSmart?

Less hassle. Greater reliability.

Eliminates refilling with a hose or an unreliable float level controller.

Simple installation

Installs quickly and easily to any new or existing pool with no damage or construction required.

Built-in protection

Built-in protection against over-filling.

Wireless

Features up to 1,000 feet of wireless communication.

Online monitoring

Optional online monitoring and alerts available with LevelSmart Online.

No maintenance

No maintenance required after installation.

Equipment protection

Eliminates risk of entrained air in the system, which can cause damage to the pump and other equipment.











KEY BENEFITS



Drop the hose

LevelSmart eliminates the chore of manually maintaining the water level with a hose and instead allows the user to kick back and enjoy their swimming pool.



Increase safety

By removing the need to have a hose draped across the pool deck, LevelSmart also removes the associated trip hazard and increases overall safety.



Retrofit anywhere

Because LevelSmart is a wireless device, it can easily be retrofitted to any swimming pool with no mess or need for deck destruction.





Extend equipment life

Using LevelSmart extends equipment life by preventing the pool pump from running dry and burning out.



Increase efficiency

By only adding water when necessary,
LevelSmart helps to reduce water and energy consumption.



Ready to use

LevelSmart constantly maintains the desired water level of your swimming pool or spa, meaning it's ready to use at all times.





Get more with LevelSmart Online

LevelSmart[™] Online offers even greater functionality and flexibility for the user. Upgrade⁽¹⁾ to LevelSmart[™] Online to gain access to these features and benefits:







Remote Monitoring from LevelSmart dashboard and App



Push Notifications





(1) Purchase of LevelSmart Online system required







SPECIFICATIONS

Technical data

Environmental	Factory-sealed batteries and electronics
Valve	24VAC valve
Maximum operating temperature	130°F / 54°C
Minimum operating temperature	40°F / 4°C
Monitoring Cycles	7-minutes per 30-minutes. Up to 336 minutes of fill time per day
Communication	1,000 feet max. of 433MHz interference free, radio communication
Dimensions	Valve Controller (HxW): 3" x 3" (7.6 x 7.6 cm); total width 4.07" (10.34 cm), screw holes 3.55" (9 cm) center-to-center
	Level Sensor (HxW): 2.85" x 2.9" (7.24 x 7.37 cm)
	Valve (HxWxL): 5" x 4.5" x 2.5" (13 x 11 x 6 cm)
	Valve Controller cables: 24VAC Power cable 55" (140 cm); 24VAC Control cable 55" (140 cm)

Available models & accessories

Part Number	Description
LSWA	Complete LevelSmart Wireless Autofill System
LSOL	Complete LevelSmart Online Wireless Autofill System
LSAE	LevelSmart Antenna Extension Cable (25ft.)
LSRS	LevelSmart Replacement Sensor











Progress through Innovation™

Our innovative solutions are developed with a focus on controlling, monitoring and measuring flow. Contact your authorized H2flow Controls solutions provider to find out how our products can help you and your customers.

Find an authorized partner at www.h2flow.net/locate-a-partner



888.635.0296



sales@h2flow.net



www.h2flow.net

AC DRIVES | ANTI ENTRAPMENT DEVICES | AUTOFILL SYSTEMS | FLOW METERS

©2024 H2flow Controls, Inc. All rights reserved. LevelSmart[™] is protected by U.S. Patent Number 9,410,336 B2

H2flow reserves the right to make changes to specifications and product features without notice. Please contact H2flow or visit www.h2flow.net for the most up-to-date versions of our product literature.



